

# Fragmented graphene on dielectric substrate for THz applications

Hamza Rehman<sup>1\*</sup>, Lena Golubewa<sup>2</sup>, Alexey Basharin<sup>1</sup>, Andzej Urbanovic<sup>2</sup>,  
Erkki Lahderanta<sup>3</sup>, Ekaterina Soboleva<sup>3</sup>, Ieva Matulaitiene<sup>2</sup>, Marija Jankunec<sup>4</sup>, Yuri Svirko<sup>1</sup>, Polina Kuzhir<sup>1</sup>

<sup>1</sup>Institute of Photonics, University of Eastern Finland, Yliopistokatu 2, FI-80100 Joensuu, Finland,

<sup>2</sup>Center for Physical Sciences and Technology, Saulėtekio av. 3, LT-10257 Vilnius, Lithuania

<sup>3</sup>Lappeenranta-Lahti University of Technology LUT, Yliopistonkatu 34, 53850, Lappeenranta, Finland

<sup>4</sup>Institute of Biochemistry, Life Sciences Center, Vilnius University, Saulėtekio al. 7, LT-10257, Vilnius, Lithuania  
hamza.rehman@uef.fi

Fragmented multi-layered graphene films were directly synthesized via chemical vapor deposition (CVD) on dielectric substrates with pre-deposited copper catalyst. We demonstrated that the thickness of the sacrificial copper film, process temperature and growth time essentially influence the integrity, quality, and disorder of the synthesized graphene. Atomic Force and Kelvin Probe Force Microscopy measurements revealed the presence of nano-agglomerates and charge puddles. The potential gradients measured over the sample surface confirmed that the deposited graphene film possesses a multilayered structure, which was modelled as an ensemble of randomly oriented conductive prolate ellipsoids (Fig.1). THz time domain spectroscopy measurements gave a conductivity of graphene flakes and homogenized graphitic films of around 1200 S/cm and 1000 S/cm (Fig. 2), respectively. Our approach offers a scalable fabrication of the graphene structures composed of graphene flakes and having effective conductivity sufficient for a wide variety of THz applications[1,2].

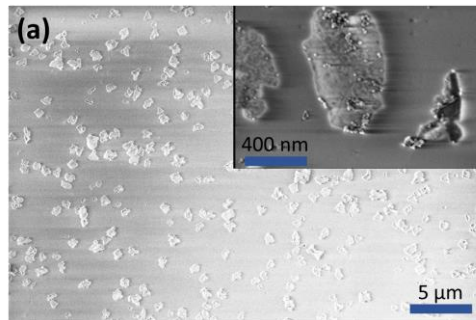


Fig. 1. Top view SEM image of CVD Graphene islands on dielectric.

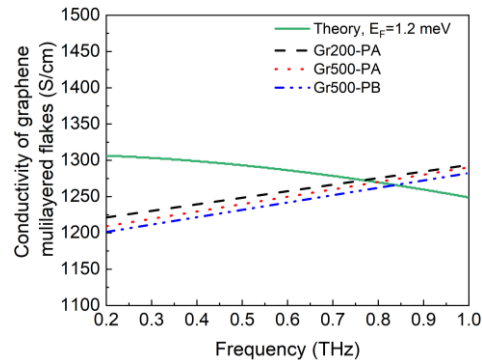


Fig. 2. Calculated conductivity of the graphene flakes and theoretical conductivity obtained by Kubo formulas at chemical potential 1.2 meV.

## Acknowledgement

This work was financially supported by H2020 RISE 734164 Graphene 3D.

## References

- [1] J. Leng *et al.*, "Investigation of terahertz high Q-factor of all-dielectric metamaterials," *Opt. Laser Technol.*, vol. 146, no. October 2021, p. 107570, 2022, doi: 10.1016/j.optlastec.2021.107570.
- [2] X. He, F. Lin, F. Liu, and W. Shi, "Tunable terahertz Dirac-semimetal hybrid plasmonic waveguides," *Opt. Mater. Express*, vol. 12, no. 1, p. 73, 2022, doi: 10.1364/ome.445362.